





#### **10 A MINIATURE POWER RELAY**

## DK RELAYS



#### **FEATURES**

- 1. Compact with high capacity High capacity switching in a small package: 1 Form A, 10 A 250 V AC; 1 Form A 1 Form B and 2 Form A, 8 A 250 V AC.
- 2. High sensitivity: 200 mW nominal operating power
- 3. High breakdown voltage Independent coil and the contact structure improves breakdown voltage.

Between contact and coil	Between open contacts
4,000 Vrms for 1 min.	1,000 Vrms for 1 min.
10,000 V surge	1,500 V surge
breakdown voltage	breakdown voltage

Conforms with FCC Part 68

- 4. Latching types available
- 5. Sealed construction allows automatic washing.
- 6. Sockets are also available
- 7. Complies with safety standards Complies with Japan Electrical Appliance and Material Safety Law requirements for operating 200 V power supply circuits, and complies with UL, CSA, and TÜV safety standards.

#### TYPICAL APPLICATIONS

- 1. Switching power supply
- 2. Power switching for various **OA** equipment
- 3. Control or driving relays for industrial machines (robotics, numerical control machines, etc.)
- 4. Output relays for programmable logic controllers, temperature controllers, timers and so on.
- 5. Home appliances

#### **About Cd-free contacts**


We have introduced Cadmium free type products to reduce Environmental Hazardous Substances.

(The suffix "F" should be added to the part number)

(Note: The Suffix "F" is required only for 1 Form A contact type. The 2 Form A and 1 Form A 1 Form B contact type is originally Cadmium free, the suffix "F" is not required.)

Please replace parts containing Cadmium with Cadmium-free products and evaluate them with your actual application before use because the life of a relay depends on the contact material and load.

## ORDERING INFORMATION

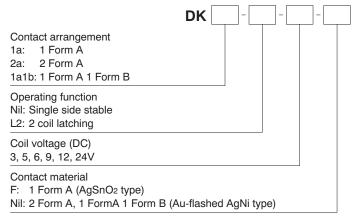

Notes: 1. UL/CSA, TÜV approved type is standard.

- 2. VDE approved type is available.
- 3. 1 coil latching type available

## DK

## **TYPES**

Contact	Nominal coil	Single side stable	2 coil latching
arrangement voltage		Part No.	Part No.
	3V DC	DK1a-3V-F	DK1a-L2-3V-F
	5V DC	DK1a-5V-F	DK1a-L2-5V-F
1 Form A	6V DC	DK1a-6V-F	DK1a-L2-6V-F
1 Form A	9V DC	DK1a-9V-F	DK1a-L2-9V-F
	12V DC	DK1a-12V-F	DK1a-L2-12V-F
	24V DC	DK1a-24V-F	DK1a-L2-24V-F
	3V DC	DK1a1b-3V	DK1a1b-L2-3V
	5V DC	DK1a1b-5V	DK1a1b-L2-5V
1 Form A	6V DC	DK1a1b-6V	DK1a1b-L2-6V
1 Form B 9V DC	DK1a1b-9V	DK1a1b-L2-9V	
	12V DC	DK1a1b-12V	DK1a1b-L2-12V
	24V DC	DK1a1b-24V	DK1a1b-L2-24V
	3V DC	DK2a-3V	DK2a-L2-3V
	5V DC	DK2a-5V	DK2a-L2-5V
0.5	6V DC	DK2a-6V	DK2a-L2-6V
2 Form A	9V DC	DK2a-9V	DK2a-L2-9V
	12V DC	DK2a-12V	DK2a-L2-12V
	24V DC	DK2a-24V	DK2a-L2-24V

Standard packing: Tube: 50 pcs.; Case: 500 pcs.

## **RATING**

#### 1. Coil data

#### 1) Single side stable

Nominal coil voltage	Pick-up voltage (at 20°C 68°F)	Drop-out voltage (at 20°C 68°F)	Nominal operating current [±10%] (at 20°C 68°F)	Coil resistance [±10%] (at 20°C 68°F)	Nominal operating power	Max. allowable voltage (at 20°C 68°F)				
3V DC		66.6mA	45Ω							
5V DC			40mA	125Ω		1				
6V DC	70%V or less of nominal voltage						33.3mA	180Ω	200mW	130%V of
9V DC	(Initial)		22.2mA	$405\Omega$	20011100	nominal voltage				
12V DC	(		16.6mA	720Ω						
24V DC			8.3mA	2,880Ω						

#### 2) 2 coil latching

9V DC nominal voltage nominal voltage (Initial) 22.2mA 22.2mA 405Ω 405Ω 200mW nominal voltage nominal voltage	Nominal coil voltage	Set voltage (at 20°C 68°F)	Reset voltage (at 20°C 68°F)	cui	operating rent 20°C 68°F)		sistance 20°C 68°F)		operating wer	Max. allowable voltage (at 20°C 68°F)
5V DC         70%V or less of nominal voltage 9V DC         70%V or less of nominal voltage (Initial)         40mA         40mA         125Ω         125Ω         125Ω         125Ω         130%V of nominal voltage 22.2mA         40mA         40mA	_			Set coil	Reset coil	Set coil	Reset coil	Set coil	Reset coil	
6V DC         70%V or less of nominal voltage         70%V or less of nominal voltage         33.3mA         33.3mA         180Ω         180Ω         200mW         200mW         130%V of nominal voltage           9V DC         (Initial)         (Initial)         22.2mA         405Ω         405Ω         200mW         200mW         130%V of nominal voltage	3V DC			66.6mA	66.6mA	45Ω	45Ω			
6V DC         nominal voltage         nominal voltage (Initial)         nominal voltage (Initial)         33.3mA         180Ω         180Ω         200mW         200mW         200mW         nominal voltage nominal voltage nominal voltage nominal voltage (Initial)	5V DC	nominal voltage nominal voltage		40mA	40mA	125Ω	125Ω			
9V DC (Initial) (Initial) $22.2\text{mA}$ $22.2\text{mA}$ $405\Omega$ $405\Omega$	6V DC		33.3mA	33.3mA	180Ω	180Ω	200mW	200mW	130%V of nominal voltage	
	9V DC		22.2mA	22.2mA	405Ω	405Ω				
12V DC   16.6mA   16.6mA   $720\Omega$   $720\Omega$	12V DC		(iiiida)	16.6mA	16.6mA	720Ω	720Ω			
24V DC 8.3mA 8.3mA 2,880Ω 2,880Ω	24V DC			8.3mA	8.3mA	2,880Ω	2,880Ω			


#### 2. Specifications

Characteristics		Item	Specifications				
	Arrangement		1 Form A	1 Form A 1 Form B	2 Form A		
Contact	Initial contact resistar	Initial contact resistance, max.		. 30 mΩ (By voltage drop 6 V De	C 1A)		
	Contact material		Au-flashed AgSnO <sub>2</sub> type	Au-flashed AgSnO2 type Au-flashed AgNi type			
	Nominal switching ca	apacity (resistive load)	10 A 250 V AC, 10 A 30 V DC	8 A 250 V AC,8 A 30 V DC	8 A 250 V AC,8 A 30 V DC		
	Max. switching powe	r (resistive load)	2,500VA, 300 W	2,000 VA, 240 W	2,000 VA, 240 W		
Rating	Max. switching voltage	де	250 V AC, 125 V DC	250 V AC, 125 V DC	250 V AC, 125 V DC		
_	Max. switching curre	nt	10 A	8 A	8 A		
	Nominal operating po	ower		200 mW			
	Min. switching capac	ity (Reference value)*1		10m A 5 V DC			
Insulation resistance (Initial)		(Initial)	Measurement at sa	Min. 1,000M $\Omega$ (at 500V DC) ame location as "Initial breakdov	vn voltage" section.		
	Breakdown voltage	Between open contacts	1,000 V	1,000 Vrms for 1min. (Detection current: 10mA.)			
Electrical characteristics	(Initial) Between contact and coil		4,000 Vrms for 1min. (Detection current: 10mA.)				
	Surge breakdown voltage*2	Between contacts and coil	10,000 V (Initial)				
Maracleristics	Temperature rise (at	65°C 149°F)	Max. 40°C (By resistive method	od, nominal voltage applied to the	ne coil; max. switching curre		
	Operate time [Set time] (at 20°C 68°F)			ms (Approx. 5 ms) [10 ms (Appr applied to the coil, excluding co			
	Release time [Reset time] (at 20°C 68°F)		Max. 8 ms (Approx. 3 ms) [10 ms (Approx. 3 ms)] (Nominal voltage applied to the coil, excluding contact bounce time.) (without diode)				
	Shock resistance	Functional	Min. 98 m/s <sup>2</sup> (Half-wa	ave pulse of sine wave: 11 ms;	detection time: 10µs.)		
Mechanical	SHOCK resistance	Destructive	Min. 980 m/s <sup>2</sup> (Half-wave pulse of sine wave: 6 ms.)				
characteristics	Vibration resistance	Functional	10 to 55 Hz at do	puble amplitude of 1.5 mm (Dete	ection time: 10µs.)		
	Destructive		10 to 55 Hz at double amplitude of 3 mm				
Expected life Mechanical				Min. 5×107 (at 300 cpm)			
-vhecten ille	Electrical		Min. 10 <sup>5</sup> (resistive load, at 20 cpm, at rated capacity)				
Conditions	Conditions for operation, transport and storage <sup>-3</sup>		Ambient temperature: -40°C to +65°C -40°F to +149°F, Humidity: 5 to 85% R.H. (Not freezing and condensing at low temperature)				
	Max. operating speed	d (at rated load)	20 cpm				
Unit weight			Approx. 5 g .18 oz	Approx. 6 g .21 oz	Approx. 6 g .21 oz		


#### Notes:

#### REFERENCE DATA


1-(1). Maximum operating power (1 Form A)



1-(2). Maximum operating power (1 Form A 1 Form B, 2 Form A)



2-(1). Life curve (1 Form A)




<sup>\*1</sup> This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.


<sup>\*2</sup> Wave is standard shock voltage of ±1.2×50μs according to JEC-212-1981.
\*3 Refer to "6. Usage, Storage and Transport Conditions" in AMBIENT ENVIRONMENT section in Relay Technical Information.

## DK


2-(2). Life curve (1 Form A 1 Form B, 2 Form A)




4-(1). Coil temperature rise (1 Form A) Tested sample: DK1a-12V, 5 pcs. Ambient temperature: 30°C 86°F




3-(1). Operate/Release time (1 Form A) Tested sample: DK1a-24V, 5 pcs.



4-(2). Coil temperature rise (1 Form A 1 Form B, 2 Form A) Tested sample: DK1a1b-12V, 5 pcs. Ambient temperature: 20°C 68°F




3-(2). Operate/Release time (1 Form A 1 Form B, 2 Form A) Tested sample: DK1a1b-12V, 5 pcs.




5-(1). Ambient temperature characteristics (1 Form A)

Tested sample: DK1a-24V, 6 pcs Ambient temperature: -40°C to +80°C



5-(2). Ambient temperature characteristics (1 Form A 1 Form B, 2 Form A)




## **DIMENSIONS** (Unit: mm inch)


#### 1. 1 Form A type

External dimensions

#### Single side stable type

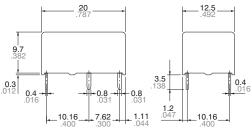



#### 2 coil latching type

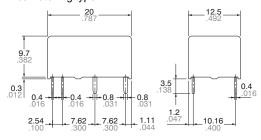

General tolerance:  $\pm 0.3 \pm .012$ 

#### PC board pattern (Bottom view)





2 coil latching

(Deenergized condition)

Schematic

(Bottom view) Single side stable



(Reset condition)

Tolerance: ±0.1 ±.004


Since this is a polarized relay, the connection to the coil should be done according to the above schematic.


#### 2. 1 Form A 1 Form B type, 2 Form A type

#### External dimensions


Single side stable type











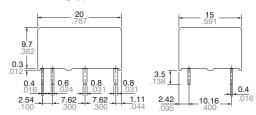

General tolerance:  $\pm 0.3 \pm .012$ 

#### PC board pattern (Bottom view)





Tolerance: ±0.1 ±.004

#### Schematic (Bottom view)

<1 Form A 1 Form B type> Single side stable



(Deenergized condition)

2 coil latching



(Reset condition)

<2 Form A> Single side stable



(Deenergized condition)

2 coil latching



(Reset condition)

Since this is a polarized relay, the connection to the coil should be done according to the above schematic.

## DK

#### **NOTES**

## 1. Soldering should be done under the following conditions:

250°C 482°F within 10s 300°C 572°F within 5s 350°C 662°F within 3s

Soldering depth: 2/3 terminal pitch

#### 2. External magnetic field

Since DK relays are highly sensitive polarized relays, their characteristics will be affected by a strong external magnetic field. Avoid using the relay under that condition.

3. When using, please be aware that the a contact and b contact sides of 1 Form A and 1 Form B types may go on simultaneously at operate time and release time.

For Cautions for Use, see Relay Technical Information.





#### **ACCESSORIES**

# DK RELAY SOCKET



#### **FEATURES**

DK relay sockets that can be used also for DY relay.

#### **TYPES**

Туре	Part No.	
1 Form A	Single side stable	DK1a-PS
i Folili A	2 coil latching	DK1a-PSL2
1 Form A 1 Form B,	Single side stable	DK2a-PS
2 Form A*	2 coil latching	DK2a-PSL2

Standard packing: Tube: 50 pcs.; Case: 500 pcs Note: \* 2 Form A type is DK relays only.

#### **RELAY COMPATIBILITY**

#### . When using the DK relays

	Socket	1 Fo	rm A	1 Form A 1 For	rm B, 2 Form A
Relay		Single side stable type	2 coil latching type	Single side stable type	2 coil latching type
1 Form A	Single side stable type	•	•	_	_
I FUIII A	2 coil latching type		•	_	_
1 Form A 1 Form B	Single side stable type	_	_	•	•
2 Form A	2 coil latching type		_	_	•

#### • When using the DY relays


Socket		1 Form A		1 Form A 1 Form B	
Relay		Single side stable type	2 coil latching type	Single side stable type	2 coil latching type
1 Form A	Single side stable type	•	•	_	_
I FUIII A	2 coil latching type	_	•	_	_
1 Form A 1 Form P	Single side stable type	_	_	•	•
1 Form A 1 Form B	2 coil latching type	1	_		•

## **SPECIFICATIONS**

Item	Specifications
Breakdown voltage	4,000 Vrms (Detection current: 10 mA) (Except the portion between coil terminals)
Insulation resistance	Min. 1,000 mΩ (at 500 V DC)
Heat resistance	150°C (for 1 hour)
Max. continuous current	10 A (DK1a-PS, DK1a-PSL2), 8 A (DK2a-PS, DK2a-PSL2)


#### **DIMENSIONS** (Unit: mm inch)




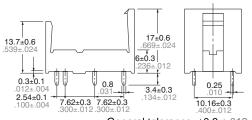


General tolerance: ±0.3 ±.012

#### PC board pattern (Bottom view)







Tolerance: ±0.1 ±.004

The above shows 2 coil latching type. No.2 and 7 terminal are eliminated on single side stable type.

## **FIXING AND REMOVAL METHOD**

1. Match the direction of relay and socket.



2. Both ends of the relay are to be secured firmly so that the socket hooks on the top surface of the relay.






3. Remove the relay, applying force in the direction shown below.



4. In case there is not enough space to grasp relay with fingers, use screwdrivers in the way shown below.



Notes: 1. Exercise care when removing relays. If greater than necessary force is applied at the socket hooks, deformation may alter the dimensions so that the hook will no longer catch, and other damage may also occur.

2. It is hazardous to use IC chip sockets.